


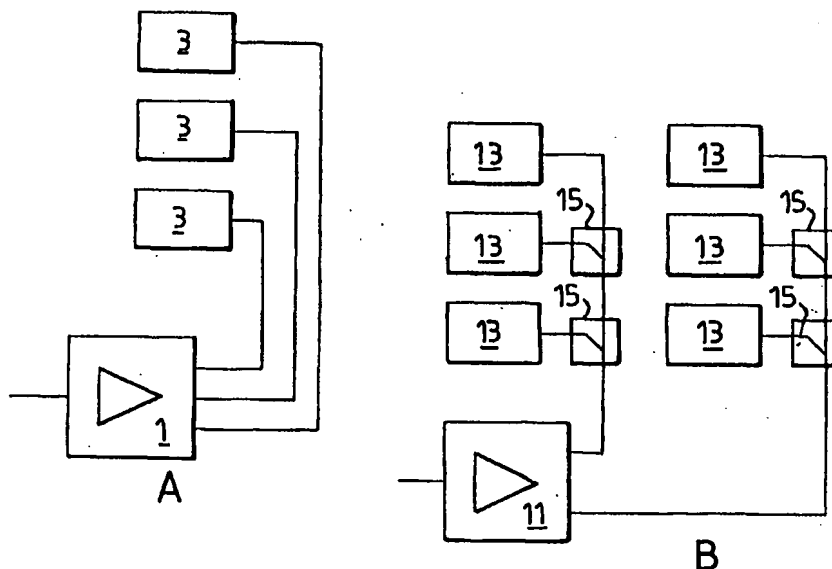

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷: H04N 7/173, H04L 5/06, 5/14 // H04N 7/081	A1	(11) International Publication Number: WO 00/05895 (43) International Publication Date: 3 February 2000 (03.02.00)
(21) International Application Number: PCT/SE99/01292 (22) International Filing Date: 19 July 1999 (19.07.99) (30) Priority Data: 9802580-2 20 July 1998 (20.07.98) SE (71) Applicant (for all designated States except US): TELEFON- AKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventor; and (75) Inventor/Applicant (for US only): SAHLIN, Dan [SE/SE]; Fatburs Brunnsgata 13, S-118 28 Stockholm (SE). (74) Agents: BERG, S., A. et al.; Albihns Patentbyrå Stockholm AB, P.O. Box 5581, S-114 85 Stockholm (SE).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: METHOD AND APPARATUS FOR DATA COMMUNICATION**(57) Abstract**

A method and an apparatus for data communication is disclosed in which a cable-TV network is used for providing data network access at a relatively low cost, especially for home use. For the in-house network a baseband data signal, for example, according to the Ethernet protocol, is combined with the cable-TV signals using filters, and distributed to one or more flats. Preferably passive filters are used. Outgoing data is transmitted along the same path in the opposite direction. The baseband data signal may also comprise a telephony signal, combined with the data signal without modulation. For external communication a separate data network may be built, a conventional cable-TV modem solution may be used, or a baseband data signal may be combined with a cable-TV network using filters, in the inventive way.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Method and Apparatus for Data Communication

Technical Field

5 The present invention relates to signal transmission and in particular to the transmission of a combined signal comprising subsignals according to two or more different protocols on the same wire.

Description of Related Art

10 A major obstacle for new telephony operators is providing the last mile to the consumer. New cabling is expensive and therefore alternatives to dedicated telephony wires all the way to the subscriber are being explored.

15 For cost reasons new cables are usually only installed when another cable, for example, Community Antenna Television (CATV - often called cable TV for simplicity) is being installed.

CATV modems are now being introduced world-wide for providing Internet access. One possibility for providing telephony is to attach an Internet Protocol (IP) telephony box to the CATV modem. Solutions where the IP telephony box is integrated
20 into the CATV modem are also being developed. WO98/57456 A1 describes a solution in which an Ethernet signal and a telephone signal are modulated onto the same cable.

25 Radio access to a single subscriber is also a possibility that is being explored commercially.

All the solutions described above are relatively expensive. New cabling in old buildings is often quite costly. For the other alternatives (modulation onto the same cable, CATV modems and radio access) the subscriber must get a new device per-
30 forming the new function. This box needs maintenance, which adds to the cost.

Furthermore, the device needs power and therefore will not work in the case of a power failure.

5 There is an increasing requirement for Internet connections from people's homes, both to enable working at home and for private use. A common solution is using modems and the ordinary telephone lines. This solution has two severe drawbacks: the telephone line is busy for the whole duration of the connection and the bandwidth is very low.

10 It is known in the art to use a cable-TV (CATV) network for the connection from a building to the external data network. TV signals and data, for example according to the Ethernet protocol, can share a transmission medium, since the TV signals and the data signals are transmitted on different frequencies and can therefore easily be separated. Each subscriber then has a CATV modem, which extracts the data signal
15 and forwards it to the subscriber's computer.

CATV modems are relatively expensive. Also, the subscriber effectively shares the bandwidth of the in-house network with all the other subscribers in the house, since all data is transported to everybody and the selection of relevant data is made in
20 each subscriber's CATV modem or computer.

Another solution known in the art is to build a separate new network for data communication, not using any part of the CATV network. For an office environment this is the standard solution. For residential access the wiring cost may be prohibi-
25 tively high.

In the Canadian Patent 1 252 169 a system combining CATV signals and unmodulated data signals is described. The system, primarily designed for hospital use, is designed in such a way that it offers a fairly low data bandwidth, sufficient for
30 transmitting information about the menu, and from climate control and other sen-

sors. It could not be used for data communications according to local area network standards used today, such as Ethernet, since it does not cater properly for the impedance requirements when the data signal is tapped. Also, it appears that amplifiers are needed along the transmission path in the Canadian system.

Object of the Invention

It is an object of the present invention to provide a method and an apparatus for the relatively inexpensive connection to a data network, especially the Internet.

It is also an object of the present invention to provide wired subscriber telephone and data connections at a reduced cost.

Summary of the Invention

This object is solved by the present invention by a signalling device comprising: a combined signal terminal arranged to receive an incoming combined signal and to transmit an outgoing combined signal, said signal comprising a telephony subsignal and an Ethernet subsignal, a telephony subsignal terminal arranged to transmit an incoming telephony subsignal derived from the combined signal and receive an outgoing telephony subsignal and an Ethernet subsignal terminal arranged to transmit an incoming Ethernet subsignal derived from the combined signal and receive an outgoing Ethernet subsignal, said signalling device being characterized in that it comprises:

filter means for combining the outgoing subsignals on the telephony subsignal terminal and the Ethernet subsignal terminal, respectively, to an outgoing combined signal to be transmitted from the combined signal terminal and for splitting an incoming combined signal received on the combined signal terminal to an incoming telephony subsignal and an incoming Ethernet subsignal to be transmitted from the telephony subsignal terminal and the Ethernet subsignal terminal, respectively.

The object is also achieved by a method in a communications network, of combining an Ethernet signal and a telephony signal, comprising the following steps:

receiving an outgoing telephony subsignal,
receiving an outgoing Ethernet subsignal,
combining the received outgoing telephony subsignal and the received outgoing
Ethernet subsignal to a combined outgoing signal using at least one filter and trans-
5 mitting the combined outgoing signal,
receiving a combined incoming signal comprising a telephony subsignal and an
Ethernet subsignal,
splitting the received combined incoming signal into an incoming telephony subsig-
nal and an incoming Ethernet subsignal using at least one filter, and
10 transmitting the incoming telephony subsignal to a subscriber via a first subsignal
terminal and transmitting the incoming Ethernet subsignal to a subscriber via a sec-
ond subsignal terminal.

15 This enables the combination of Ethernet signals and telephone signals on one ca-
ble, thus optimizing the use of network resources. The use of simple filters makes
the apparatus inexpensive and robust, especially if passive filters are used. Also, no
power supply is needed, which makes the device according to the invention even
more reliable.

20 According to a preferred embodiment, said filter means comprises at least one pas-
sive filter.

Preferably, said means comprises a high-pass filter, arranged to receive the incom-
ing combined signal and transmit the incoming Ethernet subsignal to the Ethernet
25 subsignal terminal and a low-pass filter arranged to receive the incoming combined
signal and transmit the incoming telephony subsignal to the telephony subsignal
terminal.

To balance differences in impedance between the terminals, the signalling device preferably also comprises a balun on the Ethernet subsignal terminal or on the telephony subsignal terminal.

- 5 The solution according to the invention also does not require any additional software or hardware in the computers or telephones.

The Ethernet standards used today in practice only use the frequencies higher than 100kHz.

10

An ordinary telephone signal uses the frequency range from 0-4 kHz. An ISDN telephone signal uses the frequency range from 0-80 kHz. Thus, either an ordinary telephone signal or an ISDN signal can be combined with an Ethernet signal without the need for active components such as modulators.

- 15 The present invention relates to data network access and in particular to providing access to a data network at relatively low cost, in particular at home.

The above mentioned object is also achieved according to the invention by method of distributing data using a CATV network, comprising the following steps:

- 20 - combining a baseband data signal and the CATV signal using filters.
- separating the baseband data signal and the CATV signal using essentially the same type of filters.

- 25 The object is also achieved according to the invention by an apparatus for the combination and/or splitting of CATV signals and data signals, said apparatus comprising a first input terminal adapted to receive a CATV signal, a second input/output terminal adapted to receive and transmit a data signal and a third input/output terminal adapted to receive and transmit a combined CATV and data signal, a high-pass filter on the first input/output terminal, a low-pass filter on the second input terminal

and a combining unit connected to the high-pass filter, the low-pass filter and the third input/output terminal.

According to a preferred embodiment, the filters used are passive filters.

This solution, enables the use of inexpensive passive components to split/combine the signal, since the baseband data signal is used.

In a preferred embodiment the baseband data signal is a signal according to the Ethernet protocol.

The solution according to the invention thus allows the use of standard protocols and standard equipment.

An important application of the method is for the distribution of data to and/or from at least one computer, in which case it involves the following steps in the direction towards the computer:

- combining a baseband data signal with a CATV signal to a combined signal;
- transmitting the combined signal to at least one flat using a CATV cable;
- splitting the combined signal into a baseband data signal and a TV signal;
- transmitting the data signal to the computer and the TV signal to a television set; and, in the direction from the computer:
- transmitting data from the computer along the same path as the combined signal but in the opposite direction.

In this case the apparatus comprises the following:

- means for receiving an incoming CATV signal;
- means for receiving a data signal;
- means for combining the incoming data signal and the incoming CATV signal to a combined signal;

- means for transmitting said combined signal to at least one subscriber;
- means for splitting the combined signal into a data signal and a CATV signal;
- means for receiving an outgoing baseband data signal from at least one computer and transmitting said outgoing baseband data signal.

5

In this way the data can be distributed using existing resources, that is, cables already present, which means that the network can be implemented in an inexpensive way. The method and apparatus according to the invention also makes it fairly inexpensive to add new users to the data network.

10

For example, in a star-shaped network, an Ethernet hub may be used to transmit all data to all flats, and the selection of data intended for a particular computer is carried out in the computer.

15

Alternatively a switch may be used to distribute the data, in which case only the data intended for the computer or computers connected in the same chain is transmitted to each computer.

In this way, the users do not have to share the same bandwidth, which means that each user can effectively use the entire bandwidth available for data communication.

20

In a preferred embodiment, the incoming data signal shares an incoming cable with the TV signal, and the data signal and the TV signal are demodulated in a CATV modem before the combination of the signals.

25

Please note that the data signalling is bi-directional.

The apparatus may also comprise an impedance converting unit or a balun, connected between the second input/output terminal and the low-pass filter.

In a preferred embodiment, the cut-off frequencies of the filters are substantially between 20 and 30 MHz for 10Mbit/s Ethernet. For 100 Mbit/s Ethernet a suitable cut-off frequency is 50-60 MHz.

- 5 For CATV signalling the impedance on the first input terminal is substantially 75Ω and the impedance on the second input/output terminal is substantially 50Ω .

Brief Description of the Drawings

10 The invention will be described in more detail in the following, with reference to the drawings, in which:

Figures 1A and 1B show two basic configurations of a CATV network;

Figure 2 is a schematic representation of a first preferred embodiment of the invention;

15 Figure 3 is a schematic representation of a second preferred embodiment of the invention;

Figures 4 is a schematic representation of a third preferred embodiment of the invention;

Figure 5 shows a splitting/combining device according to an embodiment of the invention;

20 Figures 6A and 6B show technical implementations for flats in which there are more than one television outlet.

Figure 7 is a schematic representation of a fourth preferred embodiment;

Figure 8 shows a receiving device used in the fourth preferred embodiment;

Figure 9 shows a device for combining an Ethernet signal and a telephony signal;

25 Figure 10 shows a device for combining a combined Ethernet and telephony signal and a CATV signal.

Detailed Description of Embodiments

30 Figure 1A shows conventional star connected CATV network. A CATV amplifier 1 receives the TV signal, which is typically distributed from the amplifier 1 to all flats

in a house. To each television set 3 in the house, or to each flat, there is a separate cable.

Figure 1B shows a conventional cascade connected CATV network. As before, a
5 CATV amplifier 11 receives the TV signal, which is typically distributed from the
amplifier 11 to all flats in a house. Several television sets 13 are connected to the
amplifier 11 by the same cable. For each television set 13 there is a receiving unit
15 splitting the power from the amplifier so that each flat gets its share.

10 Of course, combinations of the two configurations shown in Figures 1A and 1B are
possible.

Figure 2 shows a basic embodiment of the invention based on a star configuration
network like the one shown in figure 1A. As before, a CATV amplifier 101 is used
15 for receiving the TV signal. From the amplifier 101 the TV signal is distributed to a
number of flats comprising television sets 103 and personal computers 104, through
a separate cable for each flat. The TV signal may also be distributed to flats in
which there is only one or more television sets 105.

20 In this embodiment an external data network 107 is used for the data communica-
tion outside the house. The incoming data from the data network 107 is distributed,
in a distribution device 108 to each flat by the in-house CATV network. The dis-
tributing device 108 may be a hub or a switch, which distributes the incoming data
to each subscriber to a separate connection. A hub simply divides the signal into a
25 number of identical signals, so that the same data signal is distributed to all sub-
scribers. If a switch is used, the data signal for each subscriber may be transmitted
only to this subscriber. In this way, each subscriber can use the full bandwidth of the
transmission cable for his own data.

To enable the distribution of data signals through the CATV network, a splitting/combining device 109 is added to each of the cables connecting the amplifier 101 to the television sets 103. Other flats 105 do not have access to the data network 107, and are connected directly to the amplifier 101 in the conventional way. The
5 splitting/combining device 109 receives both the data signals from the data network 107 and the TV signals from the receiving unit 101, combines them to one signal and outputs a signal comprising the data signal and the TV signal. In the opposite direction, the splitting/combining device receives a signal comprising the data signal. The splitting/combining device will be discussed in more detail in connection
10 with Figure 5.

In each flat a similar splitting/combining device 111 is provided. The splitting/combining devices 109, 111 perform the same functions, but their design may vary. For example it may be feasible to include several of the splitting/combining
15 devices 109 connected directly to the amplifier 101 and the data network 107 in one unit. The splitting/combining devices 111 at the subscribers' end could be incorporated in an existing device, such as the antenna outlet. Each computer therefore receives all data. According to, for example, the Ethernet protocol, each computer is adapted to extract the information it wants from a data flow.

20

The external data connection into the building, that is before the distributing device 108, may be omitted, and if present, may be provided in any way known in the art.

In Figure 2, a separate data network is shown, that is, the data comes into the building through a separate cable 107.
25

If there is no external data connection the CATV network may be used for internal communication within the building.

Figure 3 shows a second way of implementing the external data communication using CATV modems. The data signal and the TV signal are received on the same connection by a bi-directional amplifier 201, in a way well known in the art. From the amplifier 201 the TV signal only is distributed to a number of flats (for simplicity only one is shown) comprising television sets 203 and personal computers 204, through a separate cable for each flat.

A CATV modem 207 also receives the output signal from the CATV amplifier. Other configurations are of course possible. The CATV modem 207 extracts the data signal from the combined signal and forwards this signal to a distributing device 208. The distributing device 208 may be a hub or a switch, which distributes the incoming data to each subscriber to a separate connection. The data on each of these connections is then distributed to the appropriate flat. To achieve this, a splitting/combining device 209 like the one shown in Figure 2 is used to combine the signal on each of the cables connecting the amplifier 201 to the television sets 203 with the appropriate data signal from the distributing device 208. In each apartment a similar splitting/combining device 211 is provided for separating the received data signal and TV signal.

In the opposite direction, the data signal originates in the personal computer 204, goes through the splitting/combining devices 211 and 209 to the distributing device 208. From there the signal may go back through the CATV modem 207, and after the modulation (typically between 5 and 25 MHz) in the reverse direction the data is transmitted to the external network through the amplifier 201.

A third way of implementing the external data connection would be to combine the data and the CATV signal using passive components according to the invention. In this case, a splitting/combining device 109, 111 could be used for combining the signals.

One configuration enabling this is shown in Figure 4. To the left in the figure a part of an external connection is shown. An incoming signal to a splitting/combining device 221 is assumed to comprise a baseband data signal and a CATV signal combined together by a passive component, like the one discussed in more detail in connection with Figure 5. At certain maximum distances along the path, repeaters are needed, which preferably involve a separation of the two signals. Each repeater is implemented in the following way: The incoming signal is split into the CATV signal and the baseband data signal in the splitting/combining device 221. The CATV signal is fed to a CATV amplifier 223 and the data signal is fed to a distributing device 225, which is probably a repeater but may also be a switch or a hub. The output signals from the CATV amplifier 223 and the distributing device 225 are combined again in a splitting/combining device 225.

Before the signal is fed to a CATV amplifier 231, it is split into the CATV signal and the data signal in a splitting/combining device 229. The CATV signal is fed to the CATV amplifier and the data signal is fed to a distributing device 233, preferably a switch. The output signal from the switch, for each flat, is combined again with the CATV signal, in a splitting/combining device 234 and the combined signal is passed on to each flat, in which a splitting/combining device 235 separates the signals and feeds the TV signal to a television set 236 and the data signal to a computer 237.

Figure 5 shows a preferred embodiment of the splitting/combining device 109, 111, 209, 211. The splitting/combining device has a first terminal 251 for receiving the TV signal, a second terminal 253 for receiving and transmitting the data signal, and a third terminal 255 for receiving and transmitting the combined signal. The data signal is received either from the distributing device 108, 208 or from a subscriber's computer. The TV signal is received from the CATV amplifier 101, 201. The combined signal is transmitted on the in-house CATV network.

Cable television channels are usually transmitted on frequencies higher than 47MHz. Data signals are usually transmitted using frequencies lower than 30MHz. On the first terminal 251, therefore, a high-pass filter 257 is placed to filter out the data signals and pass on the TV signal. On the second terminal 253 a low-pass filter 259 is placed to filter out the television signal and pass on the data signal. The filters 257, 259 are connected to a splitting/combining unit 261 in which the two signals are combined.

The impedance on the three connections usually differ. On the first 251 and third 255 terminal the impedance is usually 75Ω. On the second terminal the impedance is usually 50Ω. To solve this problem an impedance converter 263 may be used. This is, however optional, since the impedance difference usually will not cause significant problems.

In the split/combining devices 111, 211, at the subscriber end the first terminal 251 is connected to the subscriber's television set. The second terminal 253 is connected to the subscriber's computer, and the third terminal 257 is connected to the corresponding third terminal 257 of the split/combining devices 109, 209 at the other end. The first terminal 251 of these splitting/combining devices 109, 209 is connected to the CATV amplifier 101, 201. The second terminal 253 is connected to the distributing device 108, 208.

Figures 6A and 6B show technical implementations for flats in which there are more than one television outlet. In Figure 6A the television outlet is assumed to be after the data outlet as seen from the CATV source signal. A splitting device 301 receives the combined data and television signal, which is branched in the splitting device into a connection carrying the data signal to the computer 303 and a television signal which may be branched in one or more branching units 304 to one or more television sets 305. In Figure 6B the television outlet is assumed to be before the data outlet. A first splitting/combining device 311 receives the combined data and televi-

sion signal and splits the signal into a data signal which is fed directly to a second splitting/combining device 312, but is also branched in a branching unit 314 to one or more television sets 313.

5 So far the discussion has been focused on the 10BASE-2 Ethernet protocol. If another Ethernet protocol, for example, 10BASE-T is used, instead of the impedance converter 263 an adapter and a balun must be included in the splitting/combining device.

10 Figure 7 shows a preferred embodiment of the invention applied to a cascade coupled network like the one shown in Figure 1B. for the data into the house. As before, a CATV amplifier 401 is used for receiving the TV signal. From the amplifier 401 the TV signal is distributed to a number of flats, each having a television set 403 and a personal computer 404.

15 As in the embodiment shown in Figure 2, a separate data network 407 is used for the data communication outside the house. The incoming data from the data network 407 is distributed, in a distribution device 408, to each flat by the in-house CATV network. The distributing device 408 may be a hub which simply distributes
20 the same signal on a number of outputs, or a switch, which switches the incoming data so that only the data intended for the subscribers connected to a particular cascade is transmitted on this cascade. In Figure 7, two cascades are shown. Only one, or an arbitrary number may be used.

25 To enable the distribution of data signals through the CATV network, a splitting/combining device 409 is added to each of the cables connecting the amplifier 401 to the television sets 403. Normally there will be several splitting/combining devices 409, each connected separately to the CATV amplifier and to the distributing device 408. A receiving unit 410 is used in each flat to receive the combined
30 signal, split it into a data signal and a TV signal, distribute the signals to the televi-

sion set and the computer, respectively, combine the signal back together and pass it on to the next flat. Because of the cascade configuration, in practice, the same signal, comprising data and television signals is distributed to all the flats. If data communication is not desired in one or more flats, the receiving unit 410 may be
5 simplified as described below.

The receiving unit 410 in each flat receives the combined signal comprising both the data signals from the data network 407 and the TV signals from the receiving unit 401, combines them to one signal and outputs a signal comprising both the data signals and the TV signals. In the opposite direction, the splitting/combining device receives a signal comprising both the data signal and the TV signal and splits them into two separate signals. The splitting/combining device is identical to the one discussed in connection with Figure 5.
10

15 As for the star-shaped configuration, the data connection 407 may be omitted, or may be provided in any way known in the art. Several different embodiments of the data connection were discussed in connection with Figures 2, 3, 4a and 4b.

In the receiving unit 410 is shown in Figure 8 two splitting/combining devices 411a, 411b like the ones shown in Figure 5 are provided. In the receive direction, one of the splitting/combining devices 411a splits the received signal into a data signal and a television signal. The television signal is transmitted through a cable 412 to the other splitting/combining device 411b, a branching unit 413 on said cable 412 branching the signal to the television set. The data signal is transmitted through a data cable 414 to a transceiver 415 and from the transceiver to the other splitting/combining device 411b. The transceiver has a high input impedance and does not load the cable. Therefore, to work properly, it must be placed just a few centimetres from the cable. The transceiver is an active component and needs external power, which it normally gets from the computer using an AUI interface. From the
20
25

transceiver 415, the data connection is also branched to an AUI Ethernet card in a computer (not shown).

5 In the last flat in the cascade requesting data communication, that is, at the end of the cable, the second splitting/combining device is not needed. Instead, a terminating device is needed to terminate the data signal. For flats after the last flat requesting data communication an ordinary cascade TV network may be used, since the data signal is not recombined in the last flat requesting data communication.

10 If data communication is not desired in one or more flats, the splitting/combining devices 411a, 411b are still needed for all flats between the amplifier 401 and flats that are to be able to receive data. Therefore, receiving unit like the one 410 shown in Figure 8 but without the transceiver 415 may be installed. In this way, if data communication should be enabled at a later stage, a transceiver would have to be installed. Alternatively, a complete receiving unit 410 could be installed and the data outlet from the transceiver be blocked. A solution enabling the remote activation and deactivation of the data outlets is of course convenient. This may be done using Ethernet control packets, in which case additional hardware would be needed in the flats to inspect the control packets.

20 In an alternative embodiment the transceiver 415 in Figure 8 could be replaced by a repeater or a small hub or switch. Hubs enabling both 10BASE-2 and 10BASE-T are known in the art. The 10BASE-T end of such a hub could be connected to the external computer, while the 10BASE-2 end could be connected to the internal coaxial cable 414. As 10BASE-T is much more common than 10BASE-2 this solution may be more advantageous. The distributing unit (repeater or hub or switch) needs a power supply, but even if one distributing unit loses power the system will still work for the other flats. This is also valid if transceivers are used, as described above.

For practical reasons the distributing units, that is, hubs or switches in the flats should get their power from the CATV cable. To achieve this a direct current, or low-frequency alternating current may be fed to the distributing units together with the data and TV signals. A three-way filter is then used to separate the data signal, the TV signal and the power. A similar three-way filter is also used to recombine the signals for the outgoing CATV cable.

Instead of a transceiver, 10BASE-T hubs or switches could be used in the system. The outlet from the Ethernet hub or switch next to the CATV amplifier would then have to be fitted with baluns to convert from twisted pair cables to coaxial cables. Baluns must in this case also be used for each hub in each flat. This configuration is much more sensitive to power failure, in that if one hub stops working it will disconnect the rest of the network. Therefore, the power supply of the hubs should be from the CATV cable. There is also a limit to the number of hubs that can be cascade connected. If switches are used, there is no such limit.

Of course, since according to the Ethernet protocol a computer is able to select which cells to receive and which ones to discard, more than one computer outlet could also be included in each flat, either between the same to splitting/combining devices or with the use of more than one pair of splitting/combining devices.

The splitting/combining device can be used to an even greater advantage if, a combined Ethernet and telephony signal is applied instead of a pure Ethernet signal. An apparatus for combining an Ethernet signal and a telephony signal is shown in Figure 9.

Figure 9 shows part of a telecommunications network comprising the last part of the connection to a subscriber, that is, the cable that is dedicated to one particular subscriber.

At the subscriber's site 501 there is a first filter device 503 according to the invention, adapted to receive, on a combined signal terminal 505 a combined signal from the network, said combined signal comprising a telephony subsignal and an Ethernet subsignal. The filter device 503 comprises a low-pass filter 507, and a high-pass filter 8. The low-pass filter 507 receives the combined signal from the combined signal terminal 505 and filters out the telephony subsignal, which is passed to a first subsignal terminal 509. The high-pass filter 8 receives the combined signal from the combined signal terminal and filters out the Ethernet subsignal, which is transmitted from the high-pass filter device to a second subsignal terminal 511. Through the first and second subsignal terminals, 509 and 511, respectively, the filter device 503 is also adapted to receive a telephony signal and an Ethernet signal, respectively, from the subscriber. The subsignals received from the subscriber are combined in the filter device 503 to a combined signal, which is transmitted through the combined signal terminal 505 of the filter device 503 to the network.

In the network, typically connected to an Ethernet switch a second filter device 513, like the filter device 503 at the subscriber's site, is located. The filter device 513 comprises a combined signal terminal 515 for receiving a combined signal from the subscriber 501 and dividing the combined signal into subsignals, and for transmitting a combined signal to the subscriber 501. The filter device 513 also comprises a third subsignal terminal 519, for receiving a telephony subsignal from the telephone network and a fourth subsignal terminal 521 for receiving an Ethernet signal from the network. The subsignal terminals 519, 521 are also used to transmit the respective subsignal derived from the combined signal received from the subscriber, to the appropriate network. It should be noted that the filter devices 503 and 513 perform the same functions, only in different places in the network, and therefore can be identical.

The telephony subsignal may be any Public Switched Telephone Network (PSTN) standard, such as POTS, which uses frequencies up to 4kHz, or ISDN, which uses

frequencies up to 80kHz, or indeed any other type of signal in the frequency range 0-100kHz. A POTS signal has a maximum frequency of approximately 4kHz, and an ISDN signal has a maximum frequency of approximately 80 kHz. The filter device 507, 517 should split the signal between the maximum frequency of the telephony signal and the effective minimum frequency of the Ethernet signal, that is, 100 kHz.

The Ethernet subsignal may be any type of Ethernet signal that does not use the lower frequencies, such as 10Mb/s Ethernet, e.g. 10BASE-T, 10BASE-2 or 10BASE-5, or 100Mb/s Ethernet, e.g. 100BASE-TX.

The telephone signals received on the telephony subsignal terminal 509, 519 is received on a twisted pair cable. The data signals received on the Ethernet subsignal terminal 511, 521 are received on two (or four) twisted pairs or a coaxial cable, depending on the standard used. The connection between the two devices 503, 513 may a coaxial cable or a twisted pair. To balance the impedances between the terminals, baluns, as known in the art may have to be used on the telephony subsignal terminal 509, 519, on the Ethernet subsignal terminal 511, 521, or both.

If the cable between the two devices 503, 513 is a coaxial cable, the telephony signal needs to be rebalanced with a balun connected to the telephony subsignal terminal 509, 519. For 10BASE-2 and 10BASE-5 Ethernet, no balun will be needed for the Ethernet subsignal terminal 511, 521. For 10BASE-T and 100BASE-TX a balun must also be fitted to the Ethernet subsignal terminal 511, 521. The balun for the Ethernet subsignal terminal 511, 521 both balances the impedance and converts from traffic 2 twisted pairs to one pair, which may be a coaxial cable.

If the cable between the devices 503, 513 is a CAT5 twisted pair cable, no balun is needed on the telephone subsignal terminal 509, 519. For 10BASE-2 and 10BASE-5, which use coaxial cable, the Ethernet subsignal is first rebalanced using a balun

connected to the Ethernet subsignal terminal 511, 521. For 10BASE-T and 100BASE-TX, which use two pairs in a CAT5 cable, only one pair is filtered and combined with the telephony signal.

5 Typically, the connection shown combine the signals received from an Ethernet network and a telephone network in the second filter device 513 and transmit the combined signal to a subscriber's site, where the signal is split in the first filter device 503. It would, however be possible for both filter devices 503, 513 to serve subscribers, or for both filter devices 503, 513 to serve networks.

10

Figure 10 shows a particularly favourable application of the invention, in which a filter device 603 as shown in Figure 9 is provided at the subscriber's site and another filter device 613 as shown in Figure 9 is provided in the network, preferably near the Ethernet switch. In this application the combined Ethernet and telephony signal output from the respective filter device 603, 613 is in turn combined with another signal, such as a CATV signal, in a CATV/Ethernet filter device 605, 615, respectively. The CATV/Ethernet filter devices are similar to the splitting/combining devices shown in Figures 1-8. Like the filter devices 603,613, the filter devices 605, 615 are bi-directional, that is, in one direction they receive the combined Ethernet and telephony signal and the CATV signal and transmit the combined Ethernet and telephony and CATV signal and in the other direction it receives a combined Ethernet and telephony and CATV signal and splits it into a combined Ethernet and telephony signal and a CATV signal.

20

25 The combination made in the CATV-Ethernet filter devices 605, 615 can also be made by means of passive filters as described above. The combination of three signals as made in this application is of course particularly favourable, since it enables an even more optimized use of cable resources.

Of course, the filter devices 603, 605 and 613, 615, respectively, could be implemented in one unit, even though in Figure 2 they are shown as two separate units for clarity.

Claims

1. A signalling device (3, 13; 103, 113), comprising:
a combined signal terminal (5, 15) arranged to receive an incoming combined signal and to transmit an outgoing combined signal, said signal comprising a telephony
5 subsignal and an Ethernet subsignal;
a telephony subsignal terminal (9, 19) arranged to transmit an incoming telephony subsignal derived from the combined signal and receive an outgoing telephony subsignal;
an Ethernet subsignal terminal (11, 21) arranged to transmit an incoming Ethernet
10 subsignal derived from the combined signal and receive an outgoing Ethernet subsignal;
characterized in that it comprises
filter means (7, 8, 17, 18) for combining the outgoing subsignals on the telephony
subsignal terminal (9, 19) and the Ethernet subsignal terminal (11, 21), respectively,
15 to an outgoing combined signal to be transmitted from the combined signal terminal (5, 15) and for splitting an incoming combined signal received on the combined signal terminal (5, 15) to an incoming telephony subsignal and an incoming Ethernet subsignal to be transmitted from the telephony subsignal terminal (9, 19) and the
Ethernet subsignal terminal (11, 21), respectively.
20
2. A signalling device according to claim 1, wherein said filter means (7, 8, 17, 18) comprises at least one passive filter (8, 7, 18, 17).
3. A signalling device according to claim 1 or 2, wherein said means comprises a
25 high-pass filter (8, 18) arranged to receive the incoming combined signal and transmit the incoming Ethernet subsignal to the Ethernet subsignal terminal.
4. A signalling device according to claim 1, 2 or 3, wherein said means comprises a
30 low-pass filter (7, 17) arranged to receive the incoming combined signal and transmit the incoming telephony subsignal to the telephony subsignal terminal.

5. A signalling device (3, 13; 103, 113) according to any one of the preceding claims, further comprising a balun on the Ethernet subsignal terminal (11, 21).
6. A signalling device (3, 13; 103, 113) according to any one of the preceding
5 claims, further comprising a balun on the telephony subsignal terminal.
7. A method in a communications network, of combining an Ethernet signal and a telephony signal, comprising the following steps:
receiving an outgoing telephony subsignal,
10 receiving an outgoing Ethernet subsignal,
combining the received outgoing telephony subsignal and the received outgoing Ethernet subsignal to a combined outgoing signal using at least one filter and transmitting the combined outgoing signal,
receiving a combined incoming signal comprising a telephony subsignal and an
15 Ethernet subsignal,
splitting the received combined incoming signal into an incoming telephony subsignal and an incoming Ethernet subsignal using at least one filter, and
transmitting the incoming telephony subsignal to a subscriber via a first subsignal terminal and transmitting the incoming Ethernet subsignal to a subscriber via a sec-
20 ond subsignal terminal.
8. A method according to claim 7, wherein said at least one filter is a passive filter.
9. A method according to claim 7 or 8, further comprising the step of balancing the
25 outgoing telephony subsignal by means of a balun before combining the subsignals.
10. A method according to claim 7, 8 or 9, further comprising the step of balancing the incoming telephony subsignal by means of a balun after the splitting of the
30 combined incoming signal.

11. A method according to any one of the claims 7-10, further comprising the step of balancing the outgoing Ethernet subsignal by means of a balun before combining the subsignals.
- 5
12. A method according to any one of the claims 7-11, further comprising the step of balancing the incoming Ethernet subsignal by means of a balun after the splitting of the combined incoming signal.
- 10
13. A method of distributing data using a CATV network **characterized by**
- combining a baseband data signal and the CATV signal using filters.
 - separating the baseband data signal and the CATV signal using essentially the same type of filters.
- 15
14. A method according to claim 13, wherein the filters are passive filters.
15. A method according to claim 11 or 13, **characterized** in that the baseband data signal is a signal according to the Ethernet protocol.
- 20
16. A method for the distribution of data to and/or from at least one computer, **characterized by the steps of:**
- in the direction towards the computer:
- combining a baseband data signal with a CATV signal to a combined signal;
 - transmitting the combined signal to at least a first flat using a CATV cable;
 - 25 - splitting the combined signal into a baseband data signal and a TV signal;
 - distribution the data signal to the computer and the TV signal to a television set in said at least first flat; and,
- in the direction from the computer
- transmitting data from the computer along the same path as the combined signal
 - 30 but in the opposite direction.

17. A method according to claim 16 wherein the data signal and the CATV signal are combined again after distribution to said computer and television set, for distribution to at least one subsequent flat connected in a cascade configuration with said at least first flat.

18. A method according to claim 16 or 17, wherein all data is transmitted to all flats and the selection of data intended for a particular computer is carried out in the computer.

19. A method according to claim 16 or 17, wherein the data is switched before the combination of the signals so that only the data intended for the computer or computers connected in the same cascade is transmitted to each computer.

20. A method according to claim 16, 17, 18 or 19, wherein the incoming data signal is a baseband data signal combined with the CATV signal by means of filters and incoming on the CATV cable.

21. A method according to any one of the claims 16-20, wherein the incoming data signal shares an incoming cable with the TV signal, and the data signal and the TV signal are demodulated in a CATV modem before the combination of the signals.

22. A method according to any one of the claims 16-21, in which at least the data signalling is bi-directional.

23. A method according to any one of the claims 16-22, in which the baseband data signal is combined from an Ethernet subsignal and a telephony subsignal.

24. An apparatus for the combination and/or splitting of CATV signals and data signals characterized in that it comprises a first terminal (251) adapted to receive a

CATV signal, a second input/output terminal (253) adapted to receive and transmit a data signal and a third input/output terminal (255) adapted to receive and transmit a combined CATV and data signal, a high-pass filter (257) on the first input/output terminal (251), a low-pass filter (259) on the second input/output terminal (253) and a combining unit (261) connected to the high-pass filter (257), the low-pass filter (259) and the third input/output terminal (255).

25. An apparatus according to claim 24, further comprising an impedance converting unit connected between the second input/output terminal and the low-pass filter.

26. An apparatus according to claim 24, further comprising a balun (263) connected between the second input/output terminal and the low-pass filter.

27. An apparatus according to any one of the claims 24-26, wherein the cut-off frequencies of the filters (257, 259) are substantially between 30 and 40 MHz.

28. An apparatus according to any one of the claims 24-27, wherein the impedance on the first input/output terminal (251) is substantially 75Ω and the impedance on the second input/output terminal (253) is substantially 50Ω .

29. An apparatus according to any one of the claims 24-28, adapted for bi-directional traffic.

30. An apparatus according to any one of the claims 24-29, further comprising filter means for combining a received baseband data subsignal and a received telephony subsignal to achieve the received baseband data signal, and for splitting the transmitted baseband data signal to a baseband data subsignal and a telephony subsignal.

31. An apparatus for receiving CATV signals and data signals characterized in that it comprises

- means (101; 201; 231; 401) for receiving an incoming CATV signal;
- means (108; 408) for receiving an incoming baseband data signal;
- means (109; 209; 234; 409) for combining the incoming baseband data signal and the incoming CATV signal to a combined signal;
- 5 - means for transmitting said combined signal to at least one subscriber;
- means (111; 211; 235; 411) for splitting the combined signal into a data signal and a CATV signal;
- means for receiving an outgoing baseband data signal from at least one computer and transmitting said outgoing baseband data signal.

10

32. An apparatus according to claim 31 wherein said means (109; 209; 234; 409) for combining the incoming data signal and the incoming CATV signal to a combined signal, and the means (111; 211; 235; 411) for splitting the combined signal into a data signal and a CATV signal is a combining/splitting device according to any one

15 of the claims 24-30.

1 / 4

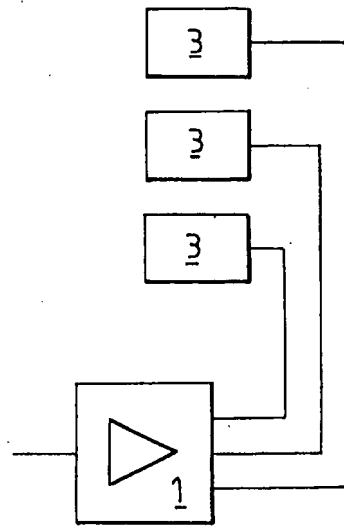


FIG. 1A

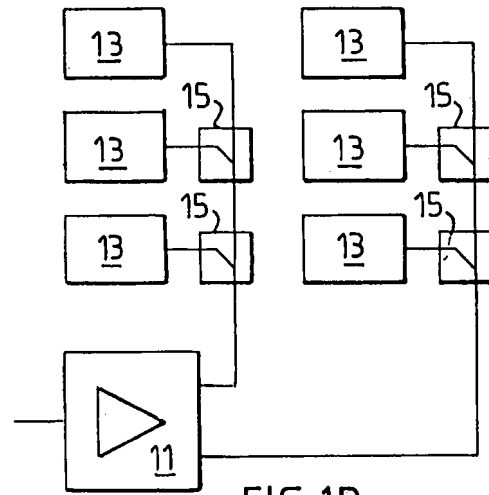


FIG. 1B

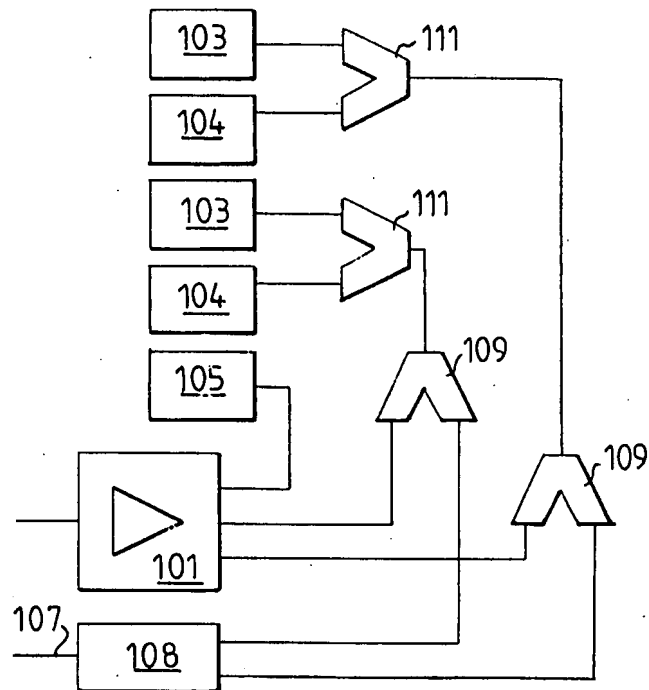


FIG. 2

SUBSTITUTE SHEET (RULE 26)

2 / 4

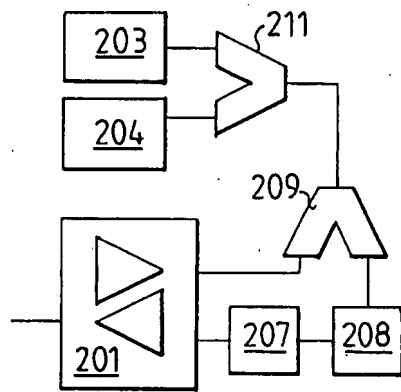


FIG. 3

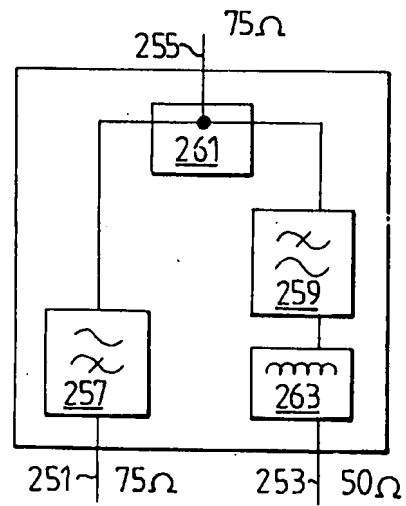


FIG. 5





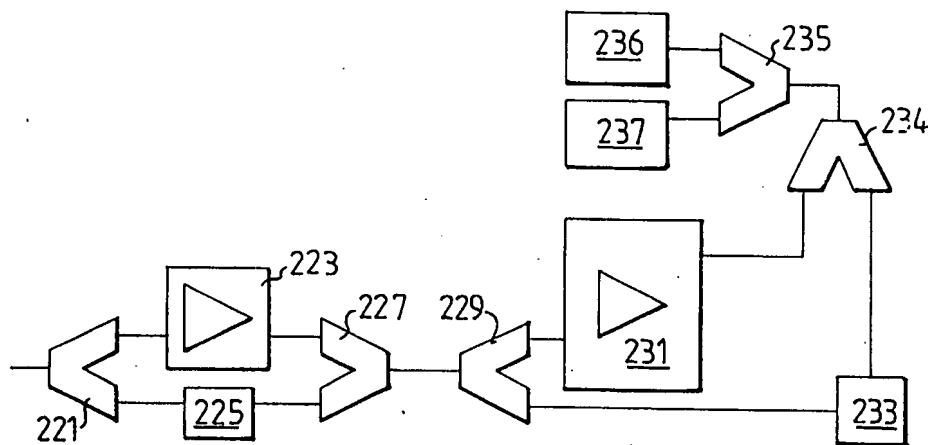


FIG. 4

SUBSTITUTE SHEET (RULE 26)

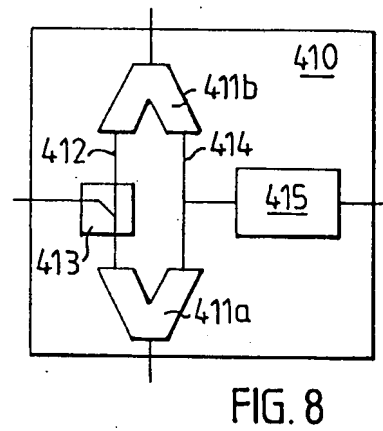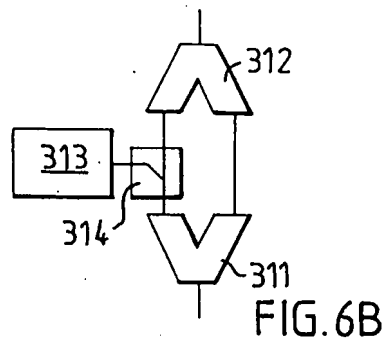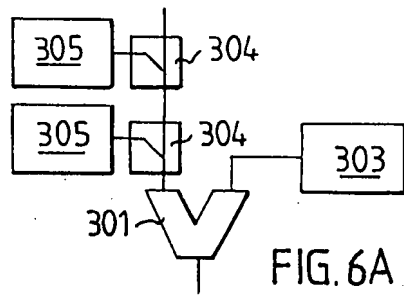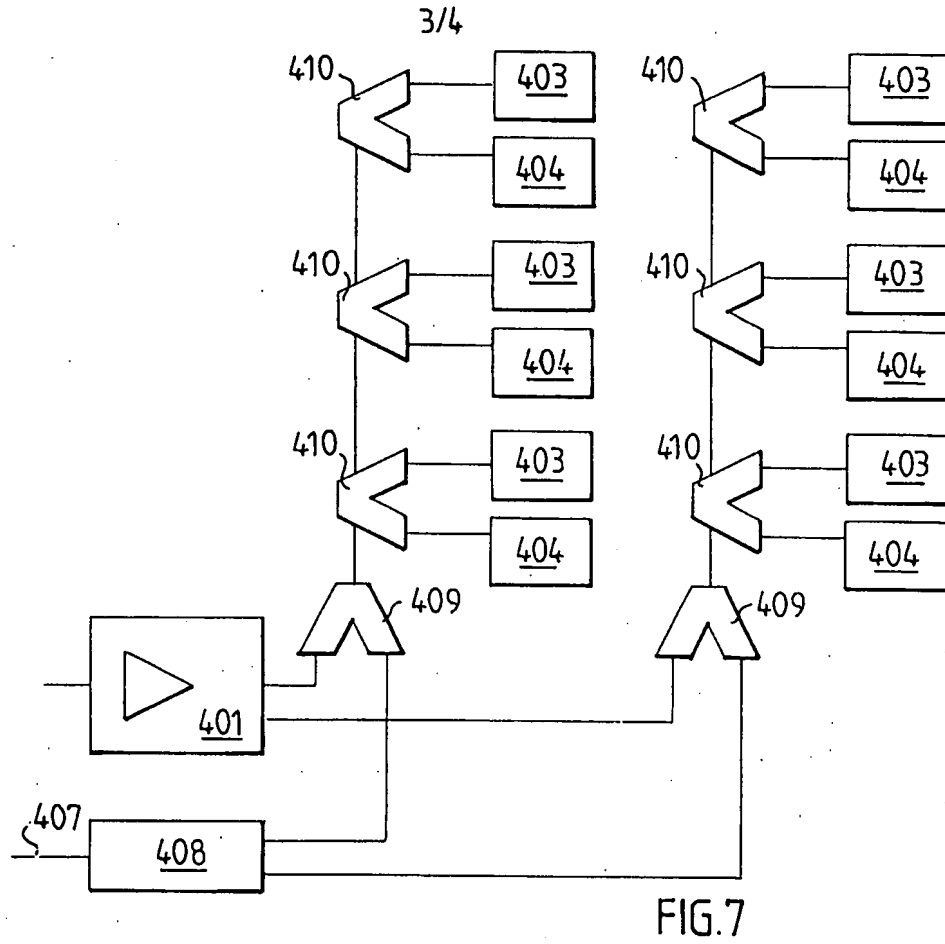

SUBSTITUTE SHEET (RULE 26)

4/4

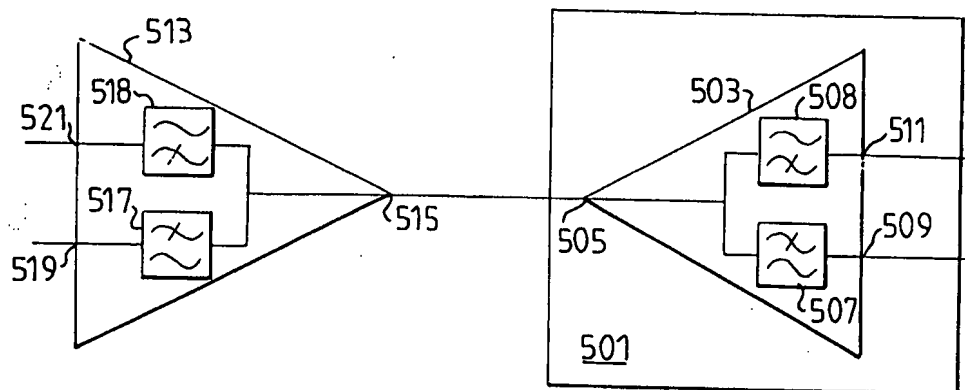


FIG. 9

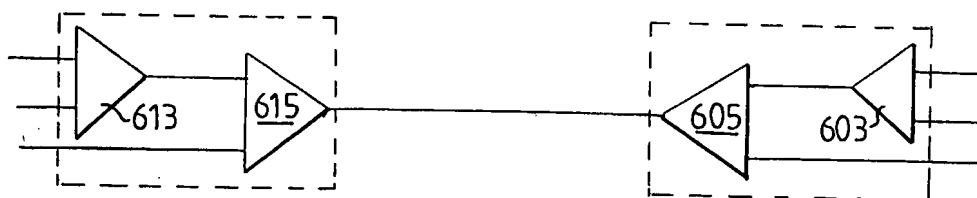


FIG. 10

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 99/01292

A. CLASSIFICATION OF SUBJECT MATTER		
IPC7: H04N 7/173, H04L 5/06, H04L 5/14 // H04N 7/081 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC7: H04N, H04L		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 9732411 A1 (ERICSSON RAYNET), 4 Sept 1997 (04.09.97), page 8, line 12 - page 10, abstract	1-4,7-8,17, 19,23,30
X	--	13-16,18, 20-22,24,29, 31-32
Y	US 5539880 A (ABDUL-MALIK H. LAKHANI), 23 July 1996 (23.07.96), column 3, line 20 - column 4	17,19
P,Y	WO 9857456 A1 (INT LABS, INC.), 17 December 1998 (17.12.98), page 2 - page 3	1-4,7-8,23, 30
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
6 December 1999		14 -12- 1999
Name and mailing address of the ISA: Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer: Michel Gascoin/MN Telephone No. +46 8 782 25 00

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 99/01292

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CA 1252169 (WNY HOSPITAL TELEVISION INC.), 4 April 1989 (04.04.89), page 4, line 9 - line 15; page 7, line 6 - line 18, figure 3, abstract --	13,16,24,31
X	US 5608446 A (DANIEL J. CARR ET AL), 4 March 1997 (04.03.97), abstract --	1,7,13,16, 24,31
A	US 5488412 A (VENKATA C. MAJETI ET AL), 30 January 1996 (30.01.96), abstract --	1-32
A	WO 9721288 A1 (ERICSSON RAYNET, A DELAWARE GENERAL PARTNERSHIP), 12 June 1997 (12.06.97), abstract --	1-32
A	WO 9305593 A1 (HYBRID NETWORKS, INC.), 18 March 1993 (18.03.93), abstract --	1-32
A	WO 9805138 A2 (SCIENTIFIC-ATLANTA, INC.), 5 February 1998 (05.02.98), abstract -- -----	1-32

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.
SE99/01292

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see next page

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☒ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.
SE99/01292

The subject matter of the claims does not constitute a single inventive concept, therefore, there is a lack of unity of the invention.

The following grouping (I and II) has been made:

I: Independent claims 1 and 7 relate to a method and a signalling device in a communication network, whereby:

- an incoming telephony signal is combined with an incoming Ethernet signal to form a outgoing composite signal;
- the outgoing composite signal is inputted into a filter so as to be split into a telephony signal and an Ethernet signal.

II: Independent claims 13, 16, 24 and 31 relate to a method and an apparatus for distributing data to and/or from a computer, whereby:

- an incoming CATV signal is combined with an incoming baseband data signal to form a outgoing composite signal;
- the outgoing composite signal is inputted into a filter so as to be split into a CATV signal (distributed to a TV) and a baseband data signal (distributed to a computer);
- data can be transmitted from the computer, using the same path as the combined signal but in the opposite direction.

The groups of inventions I and II are not so linked as to form a single inventive concept.

("telephony and Ethernet" as opposed to "CATV and baseband data"; as well as return path for the data from the computer as in II; which is not mentioned in I).

There is no technical relationship among these two groups of inventions involving one or more of the same or corresponding technical features. The subject matter of the claims should be regarded as two different inventions.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/SE 99/01292

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9732411 A1	04/09/97	AU 1965897 A EP 0893015 A US 5805591 A	16/09/97 27/01/99 08/09/98
US 5539880 A	23/07/96	NONE	
WO 9857456 A1	17/12/98	AU 7833598 A	30/12/98
CA 1252169	04/04/89	NONE	
US 5608446 A	04/03/97	CA 2174267 A CN 1145565 A EP 0742657 A SG 42401 A CA 2186220 A DE 69415349 D,T EP 0753225 A,B SE 0753225 T3 ES 2127550 T JP 9511879 T US 5534913 A WO 9527347 A	10/11/96 19/03/97 13/11/96 15/08/97 12/10/95 17/06/99 15/01/97 16/04/99 25/11/97 09/07/96 12/10/95
US 5488412 A	30/01/96	CA 2186221 A EP 0753224 A JP 9511628 T WO 9527348 A	12/10/95 15/01/97 18/11/97 12/10/95
WO 9721288 A1	12/06/97	CN 1207841 A EP 0872050 A US 5694232 A	10/02/99 21/10/98 02/12/97
WO 9305593 A1	18/03/93	AU 2554392 A EP 0603269 A US RE35774 E US 5347304 A	05/04/93 29/06/94 21/04/98 13/09/94
WO 9805138 A2	05/02/98	AU 3884897 A EP 0916200 A US 5790523 A	20/02/98 19/05/99 04/08/98

Form PCT/ISA/210 (patent family annex) (July 1992)